




ALUMINIUM • ROLLING SHUTTERS

Features:

Manufactured from AA6063 grade T5 Aluminium Extrusions with carefully designed interlocking groove and an advanced-design auto cut-off edge endlock. Anodised finish is at 12-15 microns up to 25 microns if so required in projects. The shutters can be **manually or electrically operated**. The **lightweight** model is especially ideal for manual handpull operation. Shutters can come with slotted holes, either partially or fully. Shutters can also be finished with PVC inserts that allow for viewing of goods on display within the premises, whilst providing security and natural light flow.


Applications:

Shop-fronts • Garages • Commercial and residential buildings • Schools • Industrial Buildings

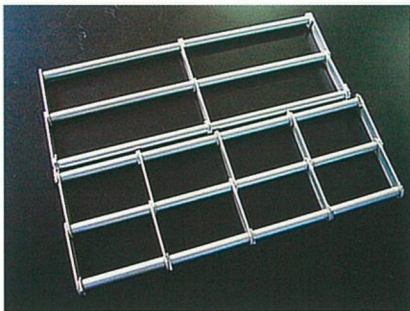


Rolling Grilles

- Brickform or Parallel Rectangle Design

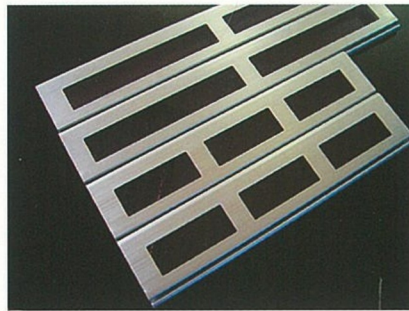

Aluminum Shutter with Ventilation Hole

- Rectangular
- Elongated Round

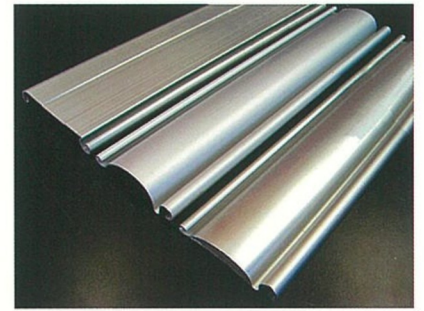

Aluminium Rolling Shutters

- Flat or Curve
- Single



• Motorise Aluminum Shutter



• Aluminum Shutter Weather Resistance



• Aluminum Shutter with Ventilation Hole

Specifications:

• Curtain

+/-1.2mm Curve profile or +/- 1.10mm Flat profile Aluminium slats.

• Curtain Bottom Bar

Heavy-duty extruded aluminium T-profile of minimum 5mm thickness. Comes in double-walled profile for motorized shutters.

• Motor Operator

c/w Proprietary brake release system and manual override endless hand-chain.

• Finish

Shutters can be in anodised, powder-coated



• Rolling Grilles with Removable Mullions